

Classico

LIGHTING

LTD Light
Fluorescent Light
Halogen Reflector Lamp
Energy Saving Lamp
Down Light



Model: DL334
Adjustable recessed downlights, aluminium die-cast body, 45° vertical swing,
Lamp: MR16 dichroic halogen lamp-max.50w




Model: DL124
Adjustable recessed downlights, metal body, 30° vertical swing,
Lamp: MR16 dichroic halogen lamp-max.50w



Model: DL145
Semi-recessed downlights, metal body, frosted glass shade,
Lamp: G4 capsule halogen lamp-max.20w



Model: DL309
Adjustable recessed downlights, aluminium die-cast body, 350° rotate and 80° vertical swing,
Lamp: MR16 dichroic halogen lamp-max.50w



Model: DL311
Adjustable recessed downlights, aluminium die-cast body, 20° vertical swing,
Lamp: MR16 dichroic halogen lamp-max.50w



Model: DL322G
Adjustable recessed downlights, zinc alloy die-cast body, metal ring and glass diffuser, 350° rotate and 30° vertical swing,
Lamp: MR16 dichroic halogen lamp-max.50w



Model: DL401
IP44 Fixed recessed downlights, aluminium die-cast body, reflector and temper glass diffuser,
Lamp: MR16 dichroic halogen lamp-max.50w



Model: DL916
Recessed cabinet downlights, metal body, aluminium reflector and temper glass diffuser,
Lamp: G4 capsule halogen lamp-max.20w



Model: TM052
360° adjustable spot lights, aluminium die-cast body, plastic track adapter and ring, with build-in dimmable electronic transformer,
Lamp: MR16 dichroic halogen lamp-max.50w



Model: TM202
360° adjustable spot lights, aluminium die-cast body and plastic track adapter, with build-in dimmable electronic transformer,
Lamp: QR111 aluminium reflector halogen lamp-max.50w




Model: WR112
Recessed mounted wall lights, metal body and glass diffuser,
Lamp: G9 base halogen lamp max.40w



Model: RT050M
110-130v, 220-240v 20-50w dimmable electronic transformer, metal case



Model: RT050MP
110-130v, 220-240v 20-50w dimmable electronic transformer, plastic case




Model: RT050CP
110-130v, 220-240v 20-50w dimmable electronic transformer, plastic case

Lighting

Classic


LIGHTING

LTD Light
Fluorescent Light
Halogen Reflector Lamp
Energy Saving Lamp
Down Light

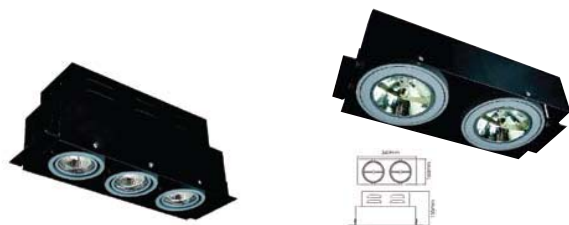

Model: DG521
3 head trimless grill lights, metal body and inner ring, build-in electronic transformer, Lamp: MR16 dichroic halogen lamp-max.50W

Model: DG611
2 head trimless grill lights, metal body and aluminium die-cast inner ring, build-in electronic transformer, Lamp: QR111 aluminium reflector halogen lamp-max.50W

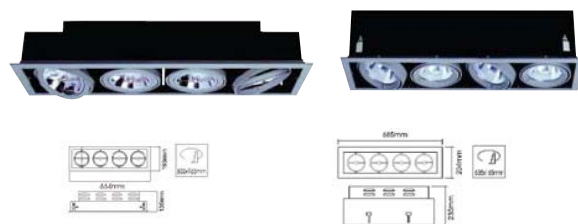

Model: DG731
4 heads grill lights, metal body and aluminium die-cast inner ring, build-in electronic transformer, Lamp: QR111 aluminium reflector halogen lamp-max.50w

Model: DG732
4 heads grill lights, metal body, aluminium die-cast inner ring and aluminium reflector, Lamp: G12 base HCI-T 35-70w metal halide lamp



Model: DG642
4 head trimless grill lights, metal body, aluminium die-cast inner ring and aluminium reflector, Lamp: G12 base HCI-T 35-70w metal halide lamp

Model: DG401
1 head grill lights, metal trim, body and inner ring, build-in electronic transformer, Lamp: MR16 dichroic halogen lamp-max.50W

Lighting



Model: A0301

ITEM NO.	A0301
MATERIAL	STEEL
LAMP	CFL LAMP
DIA.	φ122mm
CUT OUT SIZE	φ100mm
HEIGHT	133mm
PCS/CTN	75



Model: A0318

ITEM NO.	A0318
MATERIAL	STEEL
LAMP	CFL LAMP
DIA.	φ120mm
CUT OUT SIZE	φ102mm
HEIGHT	98mm
PCS/CTN	100



Model: A0401

ITEM NO.	A0401
MATERIAL	STEEL
LAMP	CFL LAMP
DIA.	φ144mm
CUT OUT SIZE	φ125mm
HEIGHT	150mm
PCS/CTN	40



Model: A0408

ITEM NO.	A0408
MATERIAL	STEEL
LAMP	CFL LAMP
DIA.	φ153mm
CUT OUT SIZE	φ125mm
HEIGHT	158mm
PCS/CTN	40



Model: A0418

ITEM NO.	A0418
MATERIAL	STEEL
LAMP	CFL LAMP
DIA.	φ152mm
CUT OUT SIZE	φ124mm
HEIGHT	159mm
PCS/CTN	40



Model: A0501

ITEM NO.	A0501
MATERIAL	STEEL
LAMP	CFL LAMP
DIA.	φ184mm
CUT OUT SIZE	φ148mm
HEIGHT	188mm
PCS/CTN	20



Model: A0518

ITEM NO.	A0518
MATERIAL	STEEL
LAMP	CFL LAMP
DIA.	φ184mm
CUT OUT SIZE	φ154mm
HEIGHT	190mm
PCS/CTN	24



Model: A0601

ITEM NO.	A0601
MATERIAL	STEEL
LAMP	CFL LAMP
DIA.	φ198mm
CUT OUT SIZE	φ165mm
HEIGHT	203mm
PCS/CTN	20




Model: A0618

ITEM NO.	A0618
MATERIAL	STEEL
LAMP	CFL LAMP
DIA.	φ200mm
CUT OUT SIZE	φ167mm
HEIGHT	200mm
PCS/CTN	24


Classico

LIGHTING

LTD Light
Fluorescent Light
Halogen Reflector Lamp
Energy Saving Lamp
Down Light



Model:4TRA



Model:2TRA



Model:3TRA

Lighting



Model:2T301

Single circuit spot lights,aluminium body,plastic adapter and aluminum reflector,build-in electronic ballast,

Lamp:G8.5 base CDM-TC 35-70W metal halide lamp

Model:4T301

3-phase spot lights,aluminium body,plastic adapter and aluminum reflector,build-in electronic ballast,

Lamp:G8.5 base CDM-TC 35-70W metal halide lamp

Model:TD301

Surface mounted spot light,aluminium body,metal base and aluminum reflector,build-in electronic ballast,

Lamp:G8.5 base CDM-TC 35-70W metal halide lamp



Model:2T302

Single circuit spot lights,aluminium body,plastic adapter and aluminum reflector,build-in electronic ballast,

Lamp:G12 base HCI-T 35-70W metal halide lamp

Model:4T302

3-phase spot lights,aluminium body,plastic adapter and aluminum reflector,build-in electronic ballast,

Lamp:G12 base HCI-T 35-70W metal halide lamp

Model:TD302

Surface mounted spot light,aluminium body,metal base and aluminum reflector,build-in electronic ballast,

Lamp:G12 base HCI-T 35-70W metal halide lamp

Classico

LIGHTING


LTD Light
Fluorescent Light
Halogen Reflector Lamp
Energy Saving Lamp
Down Light



Model: T5

Standard 16mm Tubular Fluorescent Lamps (T5)

Type No.	Type	Watt w	Rendering index Ra	Color temp k	D mm	L mm	Base	Luminous flux Lm	
L5704	T5/4W	4	74	2700/	16	136	G5	120	2
L5706	T5/6W	6		3000/		212		240	
L5708	T5/8W	8		3500/		288		330	
L5713	T5/13W	13				517		700	
L5714	T5/14W	14	>80	4100/		549		1350	
L5721	T5/21W	21		5000/		849		2100	
L5728	T5/28W	28				1149		2900	
L5738	T5/35W	35		6400		1449		3650	
T5 High Output Tubular Fluorescent Lamps (T5 HO)									
L5824	T5/24W	24	>80	2700	16	549	G5	1700	2
L5839	T5/39W	39				849		2800	
L5854	T5/54W	54		6400		1149		4500	

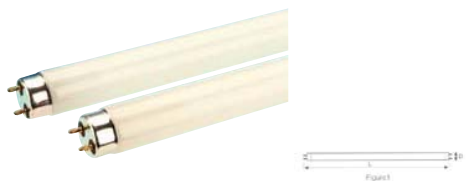


Model: T8

Standard 26mm Tubular Fluorescent Lamps (T8)

Type No.	Type	Watt w	Color temp k	Rendering index Ra	Luminous Flux Lm	D mm	L mm	Base	Packing Dimensions cm	Figure
T8 Halophosphor										
L25010W	T8/10W	10	2700	51	390				335	1
L25010C	T8/10C	10	4000	58	390					
L25010D	T8/10D	10	6500	73	370					
L25015W	T8/15W	15	2700	51	630				450	1
L25015C	T8/15C	15	4000	58	630					
L25015D	T8/15D	15	6500	73	560					
L25018W	T8/18W	18	2700	51	1150				600	1
L25018C	T8/18C	18	4000	58	1110					
L25018D	T8/18D	18	6500	73	960					
L25030W	T8/30W	30	2700	51	2100				900	1
L25030C	T8/30C	30	4000	58	2050					
L25030D	T8/30D	30	6500	73	1720					
L25036W	T8/36W	36	2700	51	2760				1200	1
L25036C	T8/36C	36	4000	58	2650					
L25036D	T8/36D	36	6500	73	2500					
L25058W	T8/58W	58	2700	51	4700				1500	1
L25058C	T8/58C	58	4000	58	4700					
L25058D	T8/58D	58	6500	73	3800					
L25032W	T8/32W	32	2700	51	2200				1200	1
L25032C	T8/32C	32	4000	58	2200					
L25032D	T8/32D	32	6500	73	2050					

Lighting

Model: JDR-C



Type No.	Type	Luminous intensity lux	Rated Voltage V	Watt w	Beam Angle	Dimensions L(mm)				Life hrs	Base	Dimensions Packing cm	Figure
						D mm	E14	E27	GX5.3	E26			
321235Alu	JDR	400	120	35							1500	GX5.3	3
321250Alu	JDR	400	230	35							2000	52X22X28	
322335Alu	JDR	1000	120	50							1500	200PCS	
322350Alu	JDR	600	230	50							2000	G.W.8kg	4
321235Dic	JDR	1100	120	75	30°	50	71+2	71+2	47+2	68+2	1500	E14E27E26	
321250Dic	JDR	900	230	75							2000	57X2938	
322350Dic	JDR	400	120	35							1500	200PCS	4
322350Dic	JDR	400	230	35							2000	G.W.17kg	



Torpedo Type CFL

- Opal and frosted cover gives decorative appearance.
- Can be put in various fixtures, or used alone.
- Up to 60% energy saver vs ordinary incandescent lamps.
- A wide selection of sizes and wattages is available.
- Color temperature can be customized.

Model: I3USNT

Art. Number		Volt (V)	Watt (W)	Base	Luminous (lm)	Dimension(mm)		
I3USN	T015					ø	D	H
	T018	110-130V 220-240V	15	B22	750	12	73	158
	T020		18	E26	890	12	73	158
			20	E27	950	12	73	158



Globe Type CFL

- Opal and frosted globe shape cover gives decorative appearance.
- Can be put in various fixtures, or used alone.
- Up to 6% energy saver vs ordinary incandescent lamps.
- A wide selection of sizes and wattages is available.
- Color temperature can be customized.

Model: I2USNG

Art. Number		Volt (V)	Watt (W)	Base	Luminous (lm)	Dimension(mm)		
I2USN-	G007					ø	D	H
	G009		7	E14/B15	220	9	60	115
	G011		9	B22	320	9	60	115
	G013		11	E26/E27	390	9	80	145
	G015	110-130V 220-240V	13		580	12	80	145
	G018		15	B22	680	12	100	148
	G020		18	E26	820	12	100	148
	G023		20	E27	1000	12	100	148
	G025		23		1150	12	120	170
			25		1230	12	120	170

Classico

LIGHTING

LTD Light
Fluorescent Light
Halogen Reflector Lamp
Energy Saving Lamp
Down Light

3U CFL

- Substantial energy saving up to 80%.
- Long life with low lumen attenuation.
- High light efficiency.
- Even light distribution, excellent color rendering.
- Instant start and flicker free.
- Sizes and wattages in a wide selection.
- Both warm and cool color are available and color temperature can be customized.



Model:I3UN

Art. Number	Volt (V)	Watt (W)	Base	Luminous (lm)	Dimension(mm)		
					ø	D	H
I3U-	110-130V 220-240V	15	B22	810	12	50	146
		18	E26	920	12	50	151
		20	E27	1080	12	50	156
		23		1350	12	50	161
		25		1500	12	50	166

2U CFL

- Dramatic energy saving.
- Extra long life.
- High light output and excellent color rendering.
- Quick start and flicker free.
- Wattages and sizes in a wide selection.
- Both warm and cool color are available and color temperature can be customized.
- Color:2007K~6400K
- Rendering Index: ≥80Ra



Model:I2US/I2UN

Art. Number	Volt (V)	Watt (W)	Base	Luminous (lm)	Dimension(mm)	
					ø	H
I2U-	110-130V 220-240V	3	B22	150	9	
		5	E26	240	9	
		7	E27	350	9	
		9	E14	430	9	
		11	B15	580	9	
I2U-	110-130V 220-240V	5	B22	240	12	
		7	E26	350	12	
		9	E27	430	12	
		11	E14	580	12	
		13	B15	650	12	

Controller Series

SRC-181-120V/240V SRC-181-12V/24V

Specifications:

1. High Voltage Type

Weight:	1.0kg	120V version
Input Voltage:	240V version/ AC220V-240V	AC100-120V
Output Voltage:	DC220V-240V	DC100-120V
Max. Power Consumption:	2640W	1440W
Max. Current:	less than 6A in one circuit, less than 12A total in two circuits.	

2. Low Voltage Type

Weight:	2.5kg(including switching power supply)	12V version
Input Voltage:	24V version/ DC24V	DC12V
Output Voltage:	DC24V	DC12V
Max. Power Consumption:	240W	120W
Max. Current:	less than 10A in one or two circuit	
Size:	235*145*112.5mm	
Signal Connector:	4-pin female connector	
DMX512 Connector:	3-pin female connector	
Operating Temperature:	-20°C~+45°C	
Housing:	ABS UL94-V0	



Controller Series

SDL-109C Series



Specifications:

Item No.:	SDL-109C DMX VER 5.1A	SDL-109C1 DMX VER 5.1A	SDL-109C-W VER 5.1A	SDL-109C-19" DMX VER 5.1A	SDL-109C-W VER 4.0
Size:	320X190X90mm	210X125.2X44.2mm	143X103X72.5mm	482.6X101.7X46mm	168.6X103X71mm
Weight:	22.5kg	1.14kg	0.35kg	1.14kg	0.35kg
Data Interface:	Proprietary Neo-Neon data protocol/ DMX-512				
Input voltage:	240VAC/50Hz 120VAC/60Hz	DC9V~12V/500mA	DC9V~12V/500mA	DC9V~12V/500mA	DC9V~12V/500mA
Output voltage:	12V DC/12.5A				
Signal connector:	4-Pin female connector	4-Pins connector	4-Pin female connector	4-Pin female connector	4-Pin female connector
Dmx512 connector:	3-Pin connector	3-Pins connector	3-Pin connector	3-Pin connector	3-Pin connector
Production rating:	IP20	IP20	IP65	IP20	IP65
Housing:	Aluminium	Aluminium	ABS UL94-V1	Steel	ABS UL94-V1
Paralleled signal:	4	1	4	4	4
Channel outputs:					




Classico

LIGHTING

LTD Light
Fluorescent Light
Halogen Reflector Lamp
Energy Saving Lamp
Down Light

RGB LED Neon-Flex

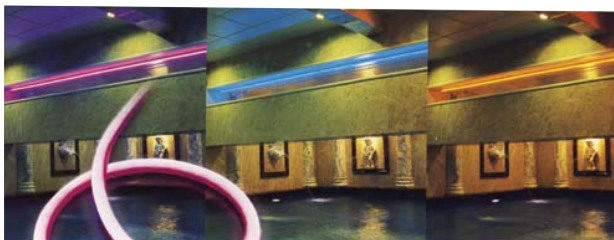

Features and Benefits:


- RGB LED Neon-Flex cover all advantages of single color Neon-Flex, for example, high and even brightness, long lifetime and durability, energy saving, flexibility, safety, transportable and easy to install.

- Controlled with our special designed controller, RGB LED Neon-Flex can present 7 different colors (RED, GREEN, YELLOW, BLUE, PURPLE, CYAN, WHITE) changing effects. The output RGB LEDs are mixed diffused to produce different colors.

Package:



150Ft(50m) package in plastic reel



Specifications:

Item NO.	LN-FX-RGB-25-240V	LN-FX-RGB-81-120V	LN-FX-RGB-81-24V
Length in Roll	24.7m	81Ft	81Ft
LED Spacing	0.5"	0.5"	0.5"
Total No. of LED	5832	5832	5832
Total Watts	324W	324W	388.8W
No. of LED per unit	216	108	18
Cutting unit	0.91m	1.5Ft	1/4Ft
Watts per Meter or Foot	13.1W/m	4W/Ft	4.8W/Ft
LED Color	RGB	RGB	RGB
Max. Loading Length	120m	200Ft	33Ft
	with SRC-191-3C-240V controller	with SRC-191-3C-240V controller	with SRC-191-3C-240V controller

3-Wires Round LED Rope Light (Horizontal)



ø13mm LED Rope Light (LED-DL(H)-3W) Specification(horizontal):

Item NO.	LED-DL(H)-3-W-100-240V			LED-DL(H)-3-W-300-120V			LED-DL(H)-3-W-300-100V			LED-DL(H)-3-W-100-24V			LED-DL(H)-3-W-300-12V		
Length in Roll	100m			300Ft			300Ft			100m			300Ft		
LED Spacing	27.7mm			1"			1"			27.7mm			1"		
LED Qty.	3600pcs			3600pcs			3600pcs			3600pcs			3600pcs		
Watts	240W	144W	240W	240W	144W	240W	200W	120W	200W	216W	144W	288W	216W	144W	288W
Watt per Meter or Foot	2.4W/m	1.44W/m	2.4W/m	0.8W/Ft	0.48W/Ft	0.8W/Ft	0.67W/Ft	0.4W/Ft	0.67W/Ft	2.16W/m	1.44W/m	2.88W/m	0.72W/Ft	0.48W/Ft	0.96W/Ft
Unit Length	4m(RG)	6.6m(R,Y)	4m(GBW)	6Ft(RG)	10Ft(R,Y)	6Ft(GBW)	6Ft(RG)	10Ft(R,Y)	6Ft(GBW)	0.66m(RG)	0.66m(R,Y)	0.33m(GBW)	1Ft(RG)	1Ft(R,Y)	0.5Ft(GBW)
LED Qty. per unit	144pcs	240pcs	144pcs	72pcs	120pcs	72pcs	72pcs	120pcs	72pcs	24pcs	24pcs	24pcs	12pcs	12pcs	6pcs

Color: clear tube with any color ultra brite ø3mm led.(Red, Yellow Green, Blue, Green, White, Orange)



ø16mm LED Rope Light (LED-DL16(H)-3W) Specification(horizontal):

Item NO.	LED-DL16(H)-3-W-100-240V			LED-DL(H)-3-W-300-120V			LED-DL(H)-3-W-300-100V			LED-DL(H)-3-W-100-24V			LED-DL(H)-3-W-300-12V		
Length in Roll	100m			300Ft			300Ft			100m			300Ft		
LED Spacing	27.7mm			1"			1"			27.7mm			1"		
LED Qty.	3600pcs			3600pcs			3600pcs			3600pcs			3600pcs		
Watts	240W	144W	240W	240W	144W	240W	201W	120W	201W	217W	144W	289W	216W	144W	288W
Watt per Meter or Foot	2.4W/m	1.44W/m	2.4W/m	0.8W/Ft	0.48W/Ft	0.8W/Ft	0.67W/Ft	0.4W/Ft	0.67W/Ft	2.17W/m	1.44W/m	2.89W/m	0.72W/Ft	0.48W/Ft	0.96W/Ft
Unit Length	4m(RG)	6.6m(R,Y)	4m(GBW)	6Ft(R,Y)	10Ft(R,Y)	6Ft(GBW)	6Ft(RG)	10Ft(R,Y)	6Ft(GBW)	0.66m(RG)	0.66m(R,Y)	0.33m(GBW)	1Ft(RG)	1Ft(R,Y)	0.5Ft(GBW)
LED Qty. per unit	144pcs	240pcs	144pcs	72pcs	120pcs	72pcs	72pcs	120pcs	72pcs	24pcs	24pcs	24pcs	12pcs	12pcs	6pcs

Color: clear tube with any color ultra brite ø5mm led.(Red, Yellow Green, Blue, Green, White, Orange)